

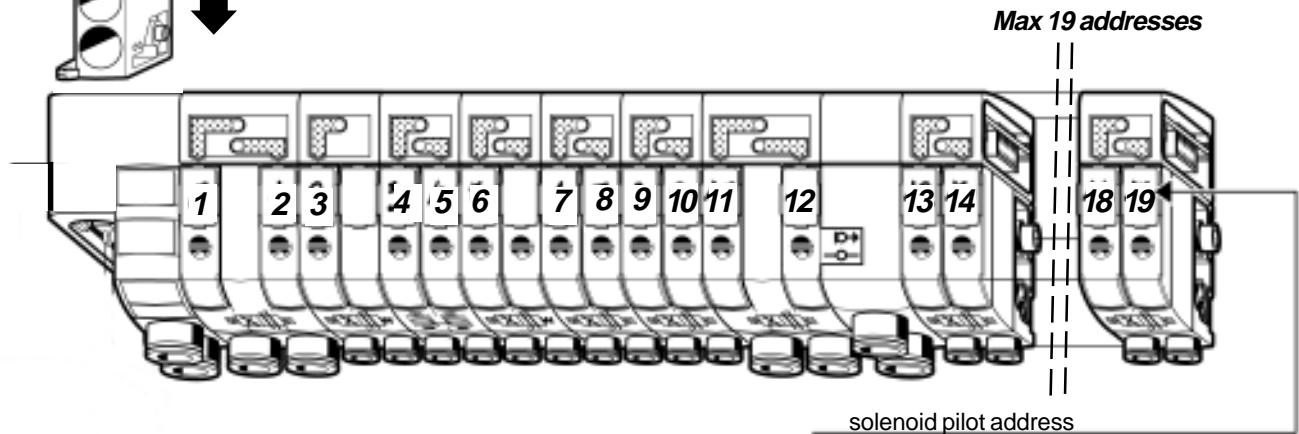



Moduflex valve system Sub-D 25 module (P2M2HEV0D)

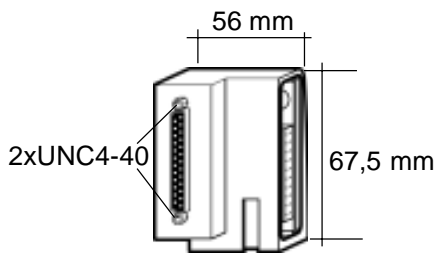

25 pin, sub-D connector (male)

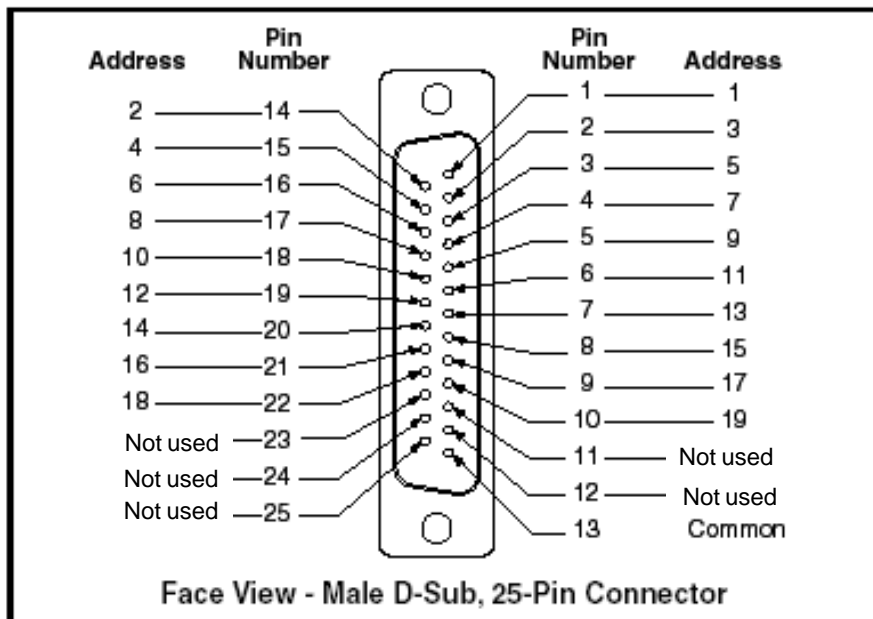

Electrical specifications

Rated voltage	24 V DC
Max addresses	19
Max energized simultaneously	19
Electrical connection	25 Pin Sub-D DIN41652, MIL-C-24308, NFC93425 type HE5
Polarity	Insensitive : PNP and NPN compatible
Dust and water protection	IP 40